
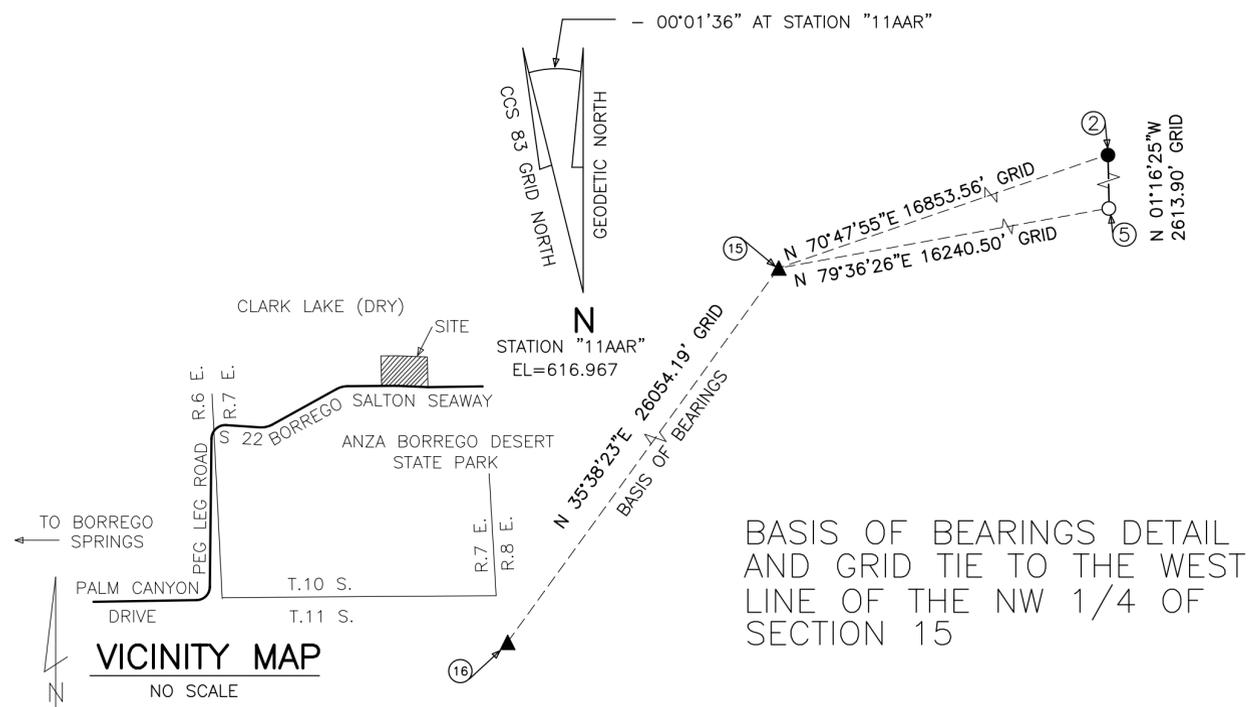
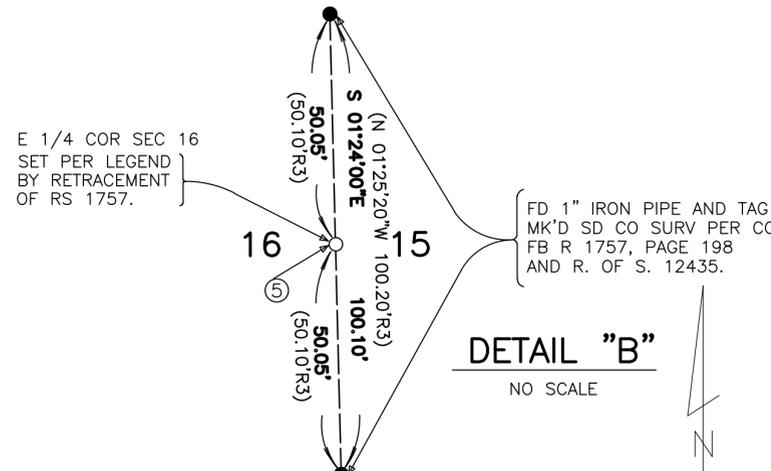


MONUMENT TABULATION

- ① W. 1/4 COR. SEC. 16. FD 2" CAPPED PIPE MK'D "1/4 COR. 17 & 16 S.D. CO. SURVEYOR" PER COUNTY FIELD BOOK R 1757 PAGE 136.
- ② NW COR. SEC. 15. FD 2" CAPPED PIPE MK'D "S.D. CO. SURVEYOR 1964" PER COUNTY FIELD BOOK R 1757 PAGE 198 & R.OF S. 18353 & R.OF S. 12435.
- ③ NW COR. SEC. 16. FD 2" CAPPED PIPE MK'D "S.D. CO. SURVEYOR 1964" PER R.OF S. 18353.
- ④ SE COR. SEC. 15. FD 3/4" IRON PIPE WITH 2 1/2" BRASS DISK MK'D "LS 2685" PER R.OF S. 6217, AND R.OF S. 12435.
- ⑤ E. 1/4 COR. SEC. 16. POSITION ESTABLISHED FROM FD 1" IRON PIPE & TAG MK'D "S.D. CO. SURV" PER COUNTY FIELD BOOK R 1757 PAGE 198, SEE DETAIL "B".
- ⑥ E. 1/4 COR. SEC. 15. ESTABLISHED BY SINGLE PROPORTIONATE MEASUREMENT. FD 1" IRON PIPE AND TAG MK'D "S.D. CO. SURV." PER COUNTY FIELD BOOK R 1757 PAGE 199 N 67°46'18"W 31.70' FROM TRUE CORNER POSITION. ACCEPTED COUNTY PIPE AS A POINT ON THE NORTH RIGHT OF WAY OF RS 1757. SEE SURVEYOR'S NOTE.
- ⑦ FD SPLIT RAIL FENCE POST WITH NAIL IN TOP PER COUNTY FIELD BOOK R 1757 PAGE 4. FENCE POST IS S 35°30'27"W 94.64' FROM TRUE CORNER POSITION. NOT ACCEPTED ON THIS SURVEY. SEE SURVEYOR'S NOTE. EXAGGERATED FOR CLARITY.
- ⑧ NE COR. OF SEC. 10. FD STEEL FENCE POST IN MOUND OF STONE PER R.OF S. 18353. REPLACED WITH 2" IRON PIPE AND TAG MK'D "LS 4670" SEE SURVEYOR'S NOTE.
- ⑨ NE COR. SEC. 13. FD 2" IRON PIPE WITH 2 1/2" BRASS CAP PER G.L.O. NOTES VOLUME 496-8 PAGE 233 AND R.OF S. 12435.
- ⑩ FD CONCRETE MONUMENT WITH BRASS DISC MK'D "S.D. CO. TRAVERSE STA. AD-2. PER CO FIELD BOOK R 1757. MONUMENT IS S 84°11'44"W 71.38' FROM TRUE CORNER POSITION. NOT ACCEPTED ON THIS SURVEY. EXAGGERATED FOR CLARITY.
- ⑪ FD 6" X 6" CONCRETE POST WITH 4" BRASS DISC STAMPED "PAINT 1940" PER R.OF S. 6217 AND R.OF S. 12435. N 72°53'22"W 394.09' FROM THE SE CORNER OF SEC. 15.
- ⑫ SW COR. SEC. 16. FD 2" CAPPED PIPE MK'D "S.D. CO. SURVEYOR 1964" PER R.OF S. 12435.
- ⑬ SE COR. SEC. 16. FD 2" IRON PIPE AND BRASS DISC MK'D "LS 3588 1989" PER R.OF S. 12435.
- ⑭ E 1/4 COR. SEC. 10. FD 12" X 10" X 8" GRANITE STONE PER G.L.O. NOTES BY A.P. HANSON DATED 1884. REPLACED WITH 2" IRON PIPE AND TAG MK'D "LS 4670".
- ⑮ GPS STATION 11AAR. FD 3 1/2" BRASS DISC STAMPED "11AAR 1960" SET IN ROCK OUTCROP PER R.OF S. 14310 AND R.OF S. 16943.
- ⑯ GPS STATION BOR 12. FD 3" BRASS DISC STAMPED "BOR 12 1963" SET IN CONCRETE MONUMENT PER R.OF S. 16943.

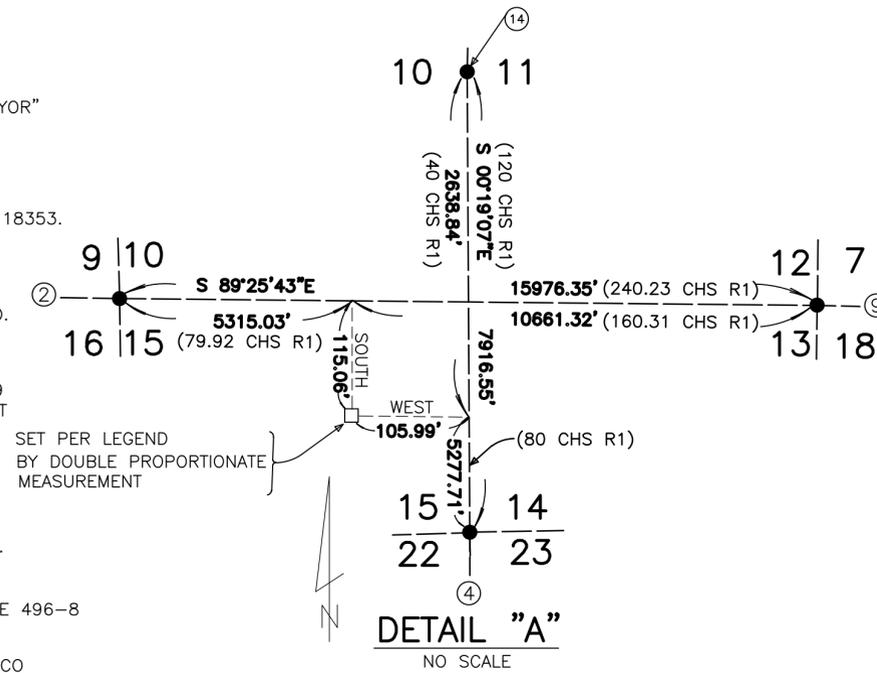

RECORD OF SURVEY OF THE NORTHWEST ONE QUARTER OF SECTION 15 TOGETHER WITH THE EAST ONE HALF OF THE NORTHEAST ONE QUARTER OF SECTION 16, ALL IN TOWNSHIP 10 SOUTH, RANGE 7 EAST, SAN BERNARDINO MERIDIAN, IN THE COUNTY OF SAN DIEGO, STATE OF CALIFORNIA.

LEGEND:

- INDICATES SET 5/8" X 18" IRON REBAR WITH PLASTIC CAP STAMPED "LS 4670".
- INDICATES SET 2" X 24" IRON PIPE WITH BRASS DISC MK'D "LS 4670".
- INDICATES POINTS FOUND AND DESCRIBED HEREON.
- ▲ INDICATES GPS POINTS FOUND AND DESCRIBED HEREON.
- (R1) INDICATES RECORD DATA PER G.L.O. NOTES PER A.P. HANSON DATED 1884.
- (R2) INDICATES RECORD DATA PER R. OF S. 18353.
- (R3) INDICATES RECORD DATA PER R. OF S. 12435.
- (R4) INDICATES RECORD DATA PER COUNTY FIELD BOOK R 1757.

SURVEYOR'S NOTE

A DILIGENT SEARCH WAS MADE FOR THE ORIGINAL CORNERS SET BY DEPUTY SURVEYOR A.P. HANSON IN 1884 AT THE N 1/4 CORNERS OF SECTIONS 15 AND 16 AND THE N 1/4 CORNERS OF SECTIONS 13 AND 14 TOGETHER WITH THE NE CORNER OF SECTION 14. NO EVIDENCE OF ORIGINAL MONUMENTATION COULD BE FOUND AT THESE LOCATIONS. IN DECEMBER 1963 A COUNTY SURVEY CREW ACCEPTED THE SPLIT RAIL FENCE POST FOR THE NE CORNER OF SECTION 15 (SEE COUNTY FIELD BOOK R 1757, PAGE 4) EXCAVATION AROUND THIS POST FAILED TO REVEAL ANY EVIDENCE OF THE ORIGINAL HANSON CORNER. THIS POST IS NOT ACCEPTED ON THIS SURVEY FOR THE NE CORNER OF SECTION 15. THE EAST-WEST CENTERLINE OF SECTION 15 PER THIS SURVEY IS AT VARIANCE WITH THE CENTER LINE ESTABLISHED ON RS 1757.

BASIS OF BEARINGS:

THE BASIS OF BEARINGS FOR THIS SURVEY IS THE CALIFORNIA COORDINATE SYSTEM OF 1983, 1991.35 EPOCH (CCS 83 (1991.35)), ZONE 6 GRID BEARING BETWEEN STATION BOR 12 AND STATION 11AAR, BOTH HAVING A CALIFORNIA COORDINATE VALUE OF FIRST ORDER ACCURACY OR BETTER, AS SAID STATIONS ARE PUBLISHED IN THE SAN DIEGO COUNTY HORIZONTAL CONTROL BOOK. I.E. S 35°38'23"W.

SURVEYOR'S STATEMENT

THIS MAP CORRECTLY REPRESENTS A SURVEY MADE BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE REQUIREMENTS OF THE PROFESSIONAL LAND SURVEYOR'S ACT AT THE REQUEST OF RICHARD WILLIAMSON, GENERAL MANAGER OF THE BORREGO WATER DISTRICT IN FEBRUARY THRU MAY, 2009.

BRIAN POLLEY P.L.S. 4670 DATE _____



COUNTY SURVEYOR'S STATEMENT

THIS MAP HAS BEEN EXAMINED IN ACCORDANCE WITH SECTION 8766 OF THE PROFESSIONAL LAND SURVEYOR'S ACT THIS _____ DAY OF _____, 2010.

TERRENCE T. CONNORS, PLS 5099 COUNTY SURVEYOR



RECORDER'S STATEMENT

FILE NO. _____ FILED THIS 22ND DAY OF JUNE, 2009, AT _____ O'CLOCK _____ IN BOOK OF RECORD OF SURVEY MAPS, AT PAGE _____, AT THE REQUEST OF BRIAN POLLEY.

DAVID L. BUTLER COUNTY RECORDER / CLERK

BY _____ DEPUTY COUNTY RECORDER

FEE: \$12.00